

YOTTA SENSE

Humidity & Temperature Data Logger SYS-TH-L



Feature


- ✓ Data save even when battery is spent
- ✓ Selectable °C or °F
- ✓ 86,000 log readings
- ✓ Built-in display shows current, min/max readings, alarm states....
- ✓ Free configuration, review, and Excel-export software
- ✓ User Replaceable Battery and External Power (DC 5V)



Technical Data

Model	SYS-TH-L	
Measure Type	Temperature & humidity	
Sensing Method	CMOS	
Range	Temp	-20~70°C
	RH	0~100%RH
Accuracy	Temp	±0.3°C (20~40°C), ±1°C (other range) (@25°C)
	RH	±3%RH (20~80%RH), ±5%RH (other range) (@25°C)
Memory	86,400 (Temp & RH)	
Logging rate	1 sec ~24 hour (adjustment)	
Storage Range	Temp	-30 ~ 80°C
	RH	0 ~ 100% RH (Non-condensing)
Resolution	0.1°C 、 0.1%	
Display	LCD , 65 × 40 mm	
Alarm Indication	Film Flicker	
Power Supply	2 × 1.5V 'AAA' batteries or DC 5V (included)	
Accessories	① USB power Adapter (DC 5V), USB cable (1.8m)	
	② HTLog SYS Software CD	
Dimensions	10 × 10 × 31.5 cm	
Test Report	Option	

Display

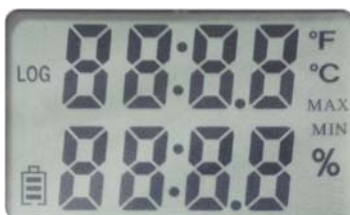

Software

Free configuration and graphing software

