

ATM/N/Ex - Analog Level Transmitter

Technical Specifications

PRESSURE MEASURING RANGE (MH2O)

	1 ... 5 (1)	> 5 ... 20	> 20 ... 250
Overpressure	3 bar	3 x FS (≥ 3 bar)	3 x FS
Burst pressure, (2)	> 200 bar	> 200 bar	> 200 bar
Accuracy, (3) (\pm % FS)	$\leq 0.5 / \leq 0.25$	$\leq 0.5 / \leq 0.25 / \leq 0.1$	$\leq 0.5 / \leq 0.25 / \leq 0.1$
Thermal shift (\pm % FS/ $^{\circ}$ C)			
Zero point 0 ... 70 $^{\circ}$ C	≤ 0.06	≤ 0.03	≤ 0.015
Zero point -25 ... 85 $^{\circ}$ C	≤ 0.08	≤ 0.04	≤ 0.02
Span 0 ... 70 $^{\circ}$ C	≤ 0.015	≤ 0.015	≤ 0.015
Span -25 ... 85 $^{\circ}$ C	≤ 0.02	≤ 0.02	≤ 0.02
Response time, (typ.)	< 1ms / 10 ... 90% FS	< 1ms / 10 ... 90% FS	< 1ms / 10 ... 90% FS
Long term stability, (4)	< 0.5% FS / < 4 mbar	< 0.2% FS / < 4 mbar	< 0.1% FS / < 0.2% FS

(1) 0.5 mH2O on request

(2) Transducer

(3) Zero based accuracy according to DIN-16086, incl. hysteresis and repeatability at ambient temperature

(4) 1 year (typ. / max.), the long term stability can be improved by ageing (burn-in) the sensor

TEMPERATURE RANGE

Operating temperature	-5 ... 80 $^{\circ}$ C (1)
Process temperature	-5 ... 80 $^{\circ}$ C (1)
Storage temperature	-10 ... 80 $^{\circ}$ C

(1) For operating temperature > 50 $^{\circ}$ C, PE or FEP cable must be used

ELECTRICAL SPECIFICATIONS

	4 ... 20 mA
Power supply	10 ... 30 VDC
Supply influence	< 0.1% FS
Circuit diagram	
Load resistance	
Load influence	< 0.1% FS

ATEX APPROVAL

Certificate, (1)	SEV 11 ATEX 0142	
Gas	II 1G Ex ia IIC T3 ... T6	EN 60079-0 / -11 / -26
Dust	II 1D Ex iaD 20 IP6x T125°C ... T80°C	
Mining	I M1 Ex ia I	EN 50303
Temperature class, (2)	T6	T4
Ambient temperature	-5 ... 50°C	-5 ... 80°C
Process temperature	-5 ... 50°C	-5 ... 80°C
Maximum values of the intrinsically safe circuit	30 V / 100 mA / 1 W	

(1) For detailed Ex specifications see certificate and operating and safety instructions

(2) Without any information about temperature class the transmitter will be delivered for T4

GL APPROVAL

Certificate	40869-01 HH
Field of application	C, EMC1

QUALIFICATIONS

	Description	Level	Typical interferences
EN 61000-4-2	Electrostatic discharge	4 kV contact / 8 kV air	
EN 61000-4-3	Irradiated RF	10V/m (0.08 ... 1 GHz, 3s)	Radio sets, wireless phones
EN 61000-4-4	Transients (burst)	2 kV	Motors, valves
EN 61000-4-5, (1)	Surge	10 kA (8 / 20 µs)	Overvoltage
EN 61000-4-6	Conducted RF	10 V (0.15 ... 80 MHz, 3 s)	Frequency converters

(1) Only with optional overvoltage protection

PHYSICAL SPECIFICATIONS

Materials	
Transducer	Stainless steel (316L / 1.4435), titanium (Gr. 2), (1)
Housing	Stainless steel (316L / 1.4404), titanium (Gr. 2)
Seals	Viton (standard), EPDM, Kalrez
Cable	PUR, FEP
Weight (2)	108 g

(1) Hastelloy (C-276) on request

(2) Specification for a ATM/N/Ex, closed, without cable

Equipment

OVERVIEW

10.00.0091	Accessories overview
------------	----------------------

Additional documents

OPERATING AND SAFETY INSTRUCTIONS

	Article number
10.88.0437	DMM042

Ordering information

	X.	XXXX.	XXXX.	XX.	XXX
Type					
	ATM/N/Ex	34			
Pressure type					
	Gauge	1			
	Absolute (vacuum)	2			
Pressure measuring range					
	50 mbar ... < 100 mbar		XX		
	100 mbar ... 25 bar		XX		
	Offset, special adjustment	99			
Process connection					
	Closed (Fig. 1)		55		
	Closed, (1.4435), for ACS certification (Fig. 1)		59		
	Open (Fig. 2)		56		
	G 1/4 M (Fig. 3)		11		
	G 1/2 M (Fig. 3)		13		
	Customized	99			
Electrical connection					
	Connectable version, IP 68 (Fig. 4), (3)		07		
	PUR cable, blue, IP 68 (4), (5)		17		
	FEP cable, blue, IP 68 (4)		22		
	Customized		99		
Output signal					
	4 ... 20 mA		05		
	4 ... 20 mA with surge protection		08		
Accuracy					
	$\leq \pm 0.5$ % FS			0	
	$\leq \pm 0.25$ % FS			1	
	$\leq \pm 0.1$ % FS			2	
Temperature range					
	T6 (Ta: -5 ... 50°C) -5 ... 50°C compensated (allowed process temperature: -5 ... 50°C)			3	
	T4 (Ta: -5 ... 80 °C) -5 ... 80°C compensated (allowed process temperature: -5 ... 80°C)			5	
Option 1					
Option 2					
Option 3					
	Ballast weight 1.4435				B
	Seals: Viton (standard)				U
	Seals: EPDM				S
	Seals: Kalrez (Level)				T
	Version titanium (without ballast weight)				K
	Humidity filter element for gauge versions (only for PUR cable)				Z

(3) Connector with required cable has to be ordered separately (KART100)

(4) Please specify the required cable length and medium

(5) For operating temperature > 50°C, FEP cable must be used

Technical drawings

Dimensions

Fig. 1: Closed version

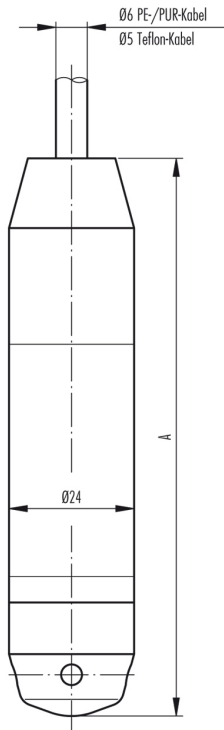


Fig. 2: Open version

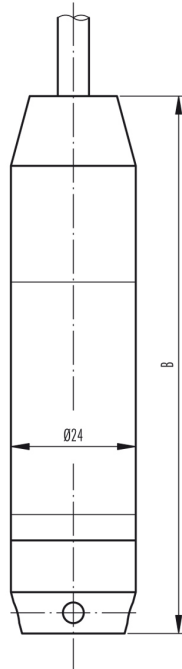


Fig. 3: with process connection


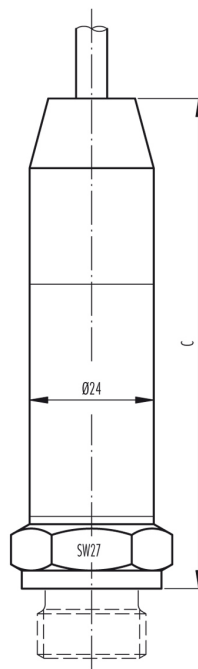


Fig. 4: Electrical connection, connectable

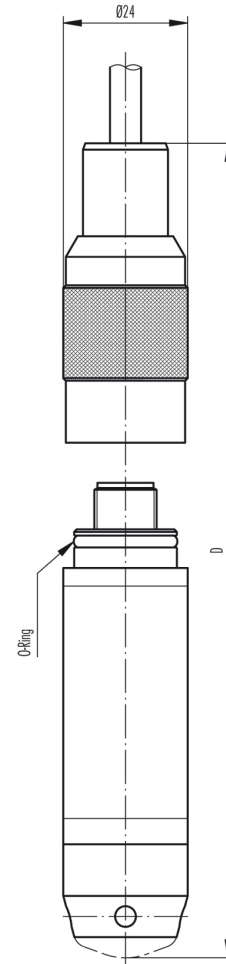

Standard	A [mm]	B [mm]	C [mm]	D [mm]	Weight[g]
without ballast weight	108	104	on request*	on request*	approx. 160
with ballast weight	195	191	on request*	on request*	approx. 420

*C: Depending on process connection

*D: Depending on process connection or version

Version with surge (lightning) protection	A [mm]	B [mm]	C [mm]	D [mm]	Weight [g]
without ballast weight	157	153	on request	on request	approx. 200
with ballast weight	244	240	on request	on request	approx. 460

Colour 2-Wire

with +Vin
yellow Pout
brown